

## 61A Lecture 8

---

## Announcements

Abstraction

## Functional Abstractions

---

```
def square(x):  
    return mul(x, x)
```

```
def sum_squares(x, y):  
    return square(x) + square(y)
```

What does `sum_squares` need to know about `square`?

- Square takes one argument. **Yes**
- Square has the intrinsic name `square`. **No**
- Square computes the square of a number. **Yes**
- Square computes the square by calling `mul`. **No**

```
def square(x):  
    return pow(x, 2)
```

```
def square(x):  
    return mul(x, x-1) + x
```

If the name “`square`” were bound to a built-in function, `sum_squares` would still work identically.

## Choosing Names

---

Names typically don't matter for correctness

***but***

they matter a lot for composition

From:	To:
true_false	rolled_a_one
d	dice
helper	take_turn
my_int	num_rolls
l, I, 0	k, i, m

Names should convey the meaning or purpose of the values to which they are bound.

The type of value bound to the name is best documented in a function's docstring.

Function names typically convey their effect (**print**), their behavior (**triple**), or the value returned (**abs**).

## Which Values Deserve a Name

---


### Reasons to add a new name

*Repeated compound expressions:*

```
if sqrt(square(a) + square(b)) > 1:  
    x = x + sqrt(square(a) + square(b))
```



```
hypotenuse = sqrt(square(a) + square(b))  
if hypotenuse > 1:  
    x = x + hypotenuse
```



*Meaningful parts of complex expressions:*

```
x1 = (-b + sqrt(square(b) - 4 * a * c)) / (2 * a)
```



```
discriminant = square(b) - 4 * a * c  
x1 = (-b + sqrt(discriminant)) / (2 * a)
```

### More Naming Tips

- Names can be long if they help document your code:

```
average_age = average(age, students)
```

is preferable to

```
# Compute average age of students  
aa = avg(a, st)
```

- Names can be short if they represent generic quantities: counts, arbitrary functions, arguments to mathematical operations, etc.

n, k, i - Usually integers

x, y, z - Usually real numbers

f, g, h - Usually functions

Testing

## Test-Driven Development

---

Write the test of a function before you write the function.

*A test will clarify the domain, range, & behavior of a function.*

*Tests can help identify tricky edge cases.*

Develop incrementally and test each piece before moving on.

*You can't depend upon code that hasn't been tested.*

*Run your old tests again after you make new changes.*

Bonus idea: Run your code interactively.

*Don't be afraid to experiment with a function after you write it.*

*Interactive sessions can become doctests. Just copy and paste.*

(Demo)



Currying

## Function Currying

---

```
def make_adder(n):  
    return lambda k: n + k
```

```
>>> make_adder(2)(3)  
5  
>>> add(2, 3)  
5
```

There's a general  
relationship between  
these functions

(Demo)


**Curry:** Transform a multi-argument function into a single-argument, higher-order function

# Decorators


# Function Decorators

---

(Demo)

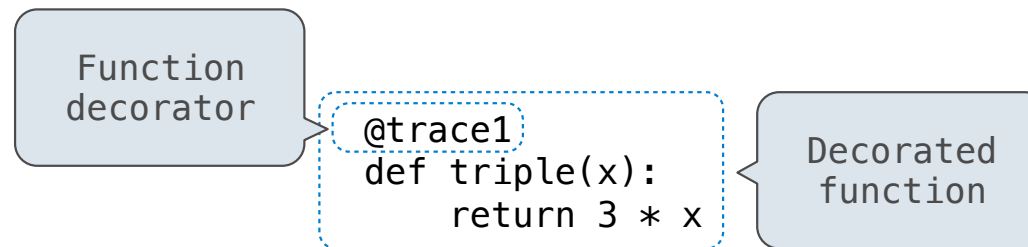

*is identical to*

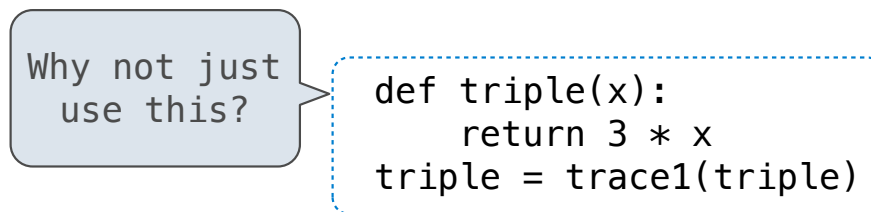

Review

## What Would Python Display?

The print function returns None. It also displays its arguments (separated by spaces) when it is called.

```
from operator import add, mul
def square(x):
    return mul(x, x)
```

A function that takes any argument and returns a function that returns that arg

```
def delay(arg):
    print('delayed')
    def g():
        return arg
    return g
```

Names in nested def statements can refer to their enclosing scope

<u>This expression</u>	<u>Evaluates to</u>	<u>Interactive Output</u>
5	5	5
print(5)	None	5
print( <u>print(5)</u> )	None	5 None
<u>delay(delay)</u> (6)()	6	delayed delayed 6
print(delay(print)()(4))	None	delayed 4 None

```
def horse(mask):  
    horse = mask  
    def mask(horse):  
        return horse  
    return horse(mask)
```

```
mask = lambda horse: horse(2)
```

```
horse(mask)
```

